




H05Z1-R (EQ)

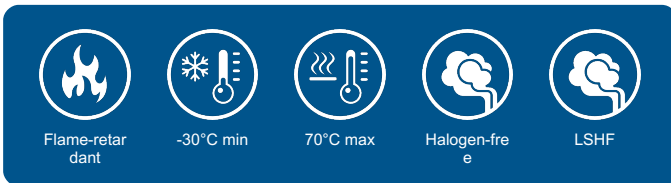

H05Z1-R is a halogen-free, flame-retardant, and low-smoke (HFFR) insulated conductor designed for fixed installations. It is primarily used in conduit or duct systems but is also suitable as a connection wire in distribution boards and similar applications.

Thanks to its HFFR insulation, the cable enhances safety by reducing smoke emissions and eliminating corrosive gases in the event of fire, protecting both people and equipment. H05Z1-R is a dependable and durable solution for modern electrical installations where fire safety is crucial.

STANDARDS

Conductor

IEC 60228 Class 2

Construction

EN 50525-3-31

Flame retardant

EN 50575:2014+A1:2016

IEC 60332-1-2

Halogen free

IEC 60754-1

IEC 60754-2

Smoke density

IEC 61034-1

IEC 61034-2

APPROVAL



CONSTRUCTION

Bending radius - Final mount flex

4 xOD

Color

According to EN 50525-1

Conductor

Class 2 Bare copper

Insulation

HFFR

Labeling example

H05Z1-R AMO S CE

PROPERTIES

Conductor temperature

70 °C

CPR class

Dca- s2, d1, a1

Max temperature

70 °C

Min. temperature

-30 °C

AC Voltage rating U_0/U

300/500V



Name	Cross section [mm ²]	Outer diameter [mm]	Installation Current in open air, ambient temperature 30°C [A]	Total weight [kg/km]
H05Z1-R 0,5	0.5	2.2	12	9
H05Z1-R 0,75	0.75	2.3	15	12
H05Z1-R 1	1	2.5	19	14

This document is automatically generated and is to be used as a guide only. May contain theoretical data. Images are for illustrative purposes only. No liability is accepted following the use of this data. Changes may be made without prior notice. It is the responsibility of the end user to determine suitability for any given application. E&OE. Copyright ©2026 Amokabel. All Rights Reserved.