




H07Z1-U (EQ)

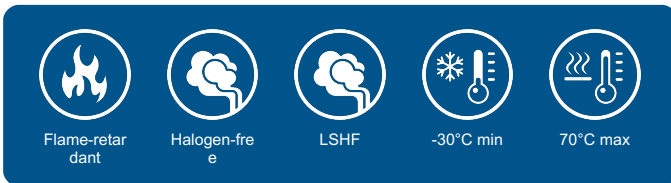

H07Z1-U is a halogen-free, flame-retardant, and low-smoke (HFFR) insulated solid conductor designed for fixed installations. It is suitable for use in conduit or duct systems, and also as a connection wire in distribution boards, lighting fixtures, and similar applications.

With its HFFR insulation, H07Z1-U enhances fire safety by reducing smoke emissions and eliminating corrosive gases, protecting both people and equipment. It is a reliable choice for modern electrical installations requiring fire safety, long service life, and dependable performance.

STANDARDS

Conductor

IEC 60228 Class 1

Construction

EN 50525-3-31

Flame retardant

EN 50575:2014+A1:2016

IEC 60332-1-2

Halogen free

IEC 60754-1

IEC 60754-2

Smoke density

IEC 61034-1

IEC 61034-2

APPROVAL



CONSTRUCTION

Bending radius - Final mount flex

4 xOD

Color

According to EN 50525-1

Conductor

Class 1. Bare solid copper

Insulation

HFFR

Labeling example

H07Z1-U TYPE 1 AMO S CE

PROPERTIES

CPR class

Dca- s2, d1, a1

Max temperature

70 °C

Min. temperature

-30 °C

AC Voltage rating U_0/U

450/750V



Name	Cross section [mm ²]	Outer diameter [mm]	Installation Current in open air, ambient temperature 30°C [A]	Total weight [kg/km]
H07Z1-U 1,5	1.5	2.8	24	20
H07Z1-U 2,5	2.5	3.4	32	31
H07Z1-U 4	4	3.8	42	47
H07Z1-U 6	6	4.3	54	66
H07Z1-U 10	10	5.4	73	112

This document is automatically generated and is to be used as a guide only. May contain theoretical data. Images are for illustrative purposes only. No liability is accepted following the use of this data. Changes may be made without prior notice. It is the responsibility of the end user to determine suitability for any given application. E&OE. Copyright ©2026 Amokabel. All Rights Reserved.